

Convection Oven Electric Convection Oven, 6 GN1/1

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



240205 (FCF61E)

6 1/1 GN grids, electric

Short Form Specification

Item No. _____

Main structure in stainless steel. Cooking chamber, grid supports, diffusers, and fan walls in stainless steel. Door with tempered glass and press-button opening and closing system. Oven chamber with rounded corners and side lighting. Flow Channel ventilation system. Heating via "Incoloy" armoured elements positioned on the convector unit. Electromechanical thermostat; temperature adjustable from 30°C to 300°C; visual display and thermometer. Timer from 0 to 120 minutes with acoustic alarm. 5-level humidity control. Functional level: base, manual. Supplied with n. 1 set of shelf guides, 60 mm pitch, for 6x1/1GN grids.

Main Features

- Racks can be easily removed without the need for special tools.
- Maximum temperature of 300°C.
- Food temperature probe (available as accessory).
- Rapid cooling of oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- 5 Stage humidification control, to ensure perfect pastries and succulent roasts.
- Meets the requirements of CE, VDE and DVGW for safety.
- Perfect evenness: guarantees perfect distribution of heat throughout the oven cavity.

Construction

- Access to all components from the front.
- Stainless steel oven cavity with rounded corners.
- External access door for electrical connections.
- All connections made on the left side below the oven.
- Integrated drain outlet.
- IPx4 water protection.

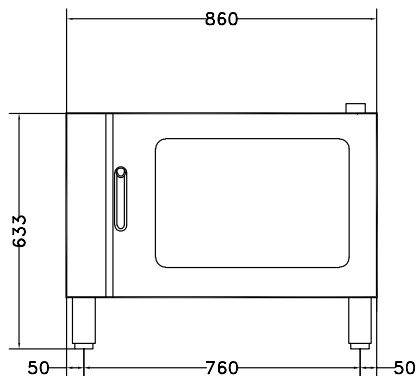
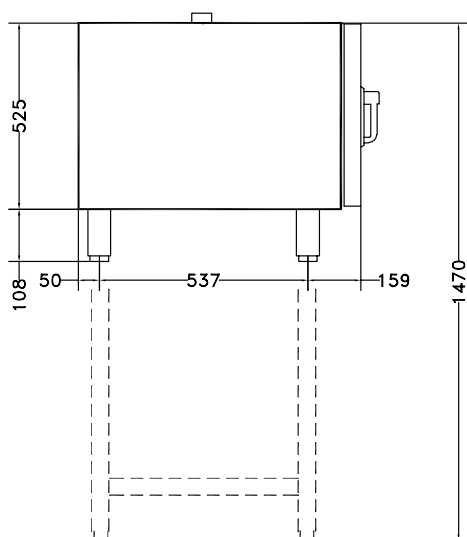
APPROVAL: _____

Optional Accessories

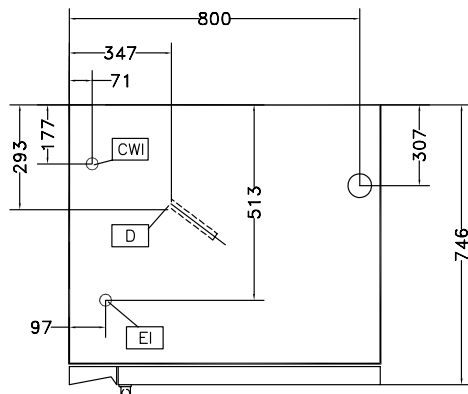
- | | | |
|---|------------|--------------------------|
| • Pair of 1/1 GN grids in 304 AISI | PNC 921101 | ☐ |
| • Pair of 1/2 GN pan support shelves | PNC 921106 | ☐ |
| • Water softener with salt for ovens with automatic regeneration of resin | PNC 921305 | ☐ |
| • Probe for 6-10 1/1 GN ovens | PNC 921702 | ☐ |
| • 1/1 GN drain pan guide kit | PNC 921713 | ☐ |
| • Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 | PNC 922036 | ☐ |
| • Open base for 6 GN 1/1 convection oven | PNC 922101 | ☐ |
| • Shelf guides for 6 1/1 GN oven base | PNC 922105 | ☐ |
| • Feet for 6&10x1/1 GN and 10x2/1 GN ovens | PNC 922127 | ☐ |
| • Retractable hose reel water spray unit | PNC 922170 | ☐ |
| • External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) | PNC 922171 | ☐ |
| • Pair of frying baskets | PNC 922239 | ☐ |
| • Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 | PNC 922266 | ☐ |
| • Kit universal skewer rack and 6 short skewers for Lengthwise GN 2/1 and Crosswise ovens | PNC 922325 | ☐ |
| • Universal skewer rack | PNC 922326 | ☐ |
| • Smoker for lengthwise and crosswise oven | PNC 922338 | ☐ |

Convection Oven

Electric Convection Oven, 6 GN1/1

Front

Side


- CW11** = Cold Water inlet 1 (cleaning)
CW12 = Cold Water Inlet 2 (steam generator)
D = Drain
EI = Electrical inlet (power)

Top


Electric

Supply voltage:

240205 (FCF61E)

380-400 V/3N ph/50 Hz

Electrical power max.:

7.7 kW

Capacity:

Shelf capacity:

6

Key Information:

External dimensions, Width:

860 mm

External dimensions, Depth:

746 mm

External dimensions, Height:

633 mm

Net weight:

79.5 kg

Functional level:

Basic

Type of grids:

1/1 Gastronorm

Runners pitch:

60 mm

Cooking cycles - air-convection:

300 °C

Heating-up time (hot air cycle):

215°C / 300s.